


SULFURIC ACID ABSORPTION TOWER

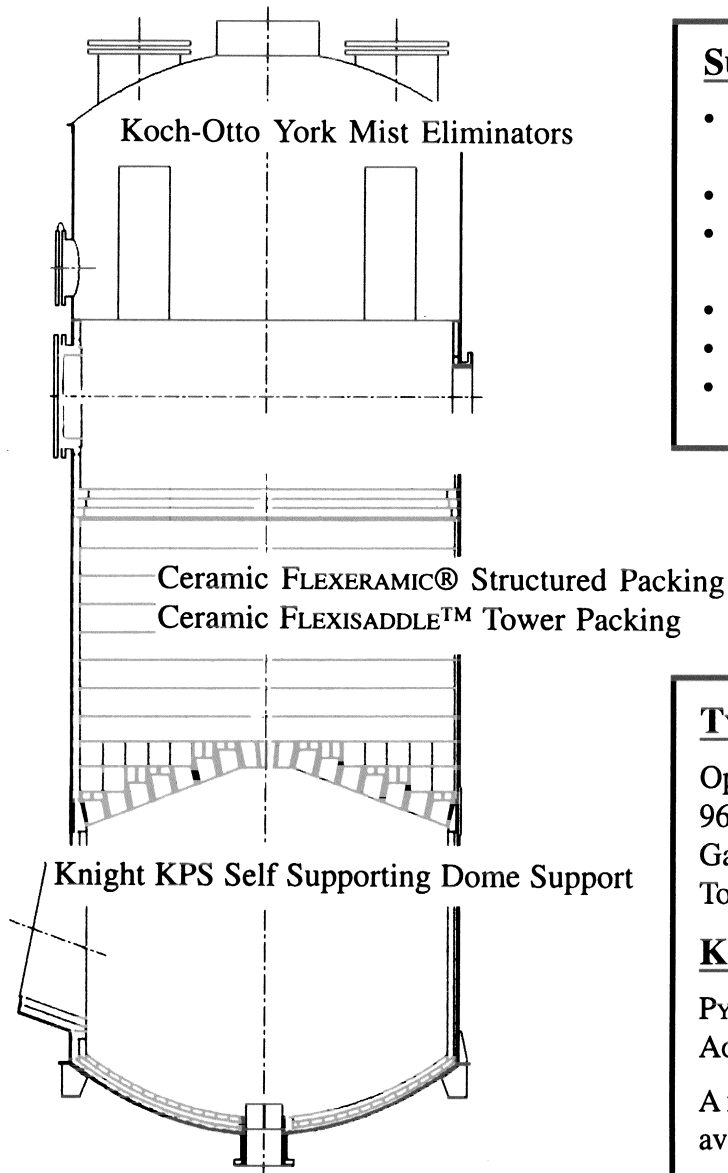

SULFURIC ACID PRODUCTS AND SERVICES

- State-of-the-art process design for new units or upgrading (de-bottlenecking) of existing units.
- Design, manufacture and installation of lined tower.
- Design, manufacture and installation of tower internals and packing.
- Shop and field construction capabilities.
- Turn-key supply.
- Full maintenance services for existing units.

TYPICAL OPERATING CONDITIONS:

Operating Temperature 180-240°F

96-98% Sulfuric Acid

Gas Inlet Temperature 350-500°F

Tower Diameters 10-35 feet

KNIGHT MANUFACTURED LINING MATERIALS:

PYROFLEX® membrane, KNIGHT-WARE® Brick and ACIDSIL™ mortar

A full range of engineered materials of construction are available to fulfill requirements and customer preference.

Visit our web site at: www.kochknight.com

FLEXISADDLE™ is a trademark of Koch Engineering, Inc.

NOTE: "The information contained in this bulletin is believed to be accurate and reliable but is not to be construed as implying any warranty or guarantee of performance."

VISIT OUR WEBSITE
www.kochknight.com