



# Titan Industries, Inc.


Innovative Technology Global Solutions

22335 GOSLING RD. • SPRING, TX 77389 • TEL #: (800) 365-2162 (281) 353-3600

## TITAN SAFTPAC™




PRECISION CHEMICAL INJECTOR

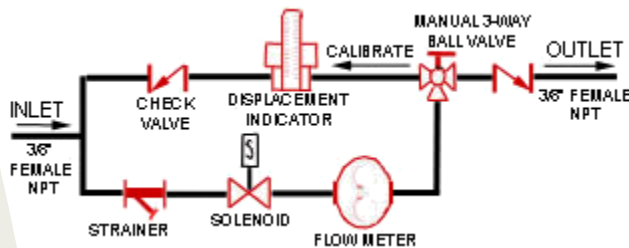

## TITAN SAFTCAL™



CALIBRATION BLOCK

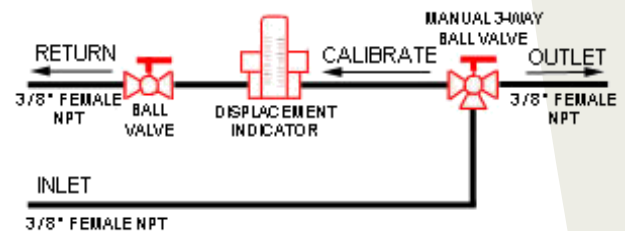

The Titan SAFTPAC™ is a new *safe touch* injector designed with safety in mind by Titan Industries, Inc. It has a built-in calibration feature that allows the operator to calibrate the injector without having to touch the liquid additive or breathe any additive vapors. The calibrated cylinder displays accurate measurement of chemical additive. Internal check valves can be removed for cleaning or for replacement. With the Titan SAFTPAC™, there is no loss of additive because all of the liquid is in a closed loop which eliminates spills or exposure when properly installed. The spring-loaded cylinder returns the additive to either the additive tank during operation of the additive system or additive line when the pump is turned off and the pressure is reduced.

For customers who have existing injectors but would like to take advantage of Titan's new *safe touch* technology of the Titan SAFTPAC™, the Titan SAFTCAL™ is available. The Titan SAFTCAL™ is a product that can be attached to existing injectors in order to enable use of the *safe touch* calibration technology. When installed properly, the Titan SAFTCAL™ calibrations unit has a built-in calibration cylinder that provides extremely accurate, repeatable calibrations without having any harmful additive liquid or vapors affecting the user. Both the Titan SAFTPAC™ and the Titan SAFTCAL™ can eliminate exposure to harmful vapors and additive liquids by the user during calibration. The standard Titan SAFTCAL™ unit comes with a 100 mL cylinder with an optional 200 and 350 mL cylinder available.

### TECHNICAL SPECIFICATIONS

#### TITAN SAFTPAC™

- Dimensions: 9.75" L x 3" W x 5.9" H
- Weight: 10 lbs
- Inlet/Outlet: 3/8"
- Solenoid: 110vac/220vac
- Flow Sensor: 5 to 24 vdc
- Max Op Press: 260psi
- Flowrate: 0 to 2 gal/min
- Typ Kfactor: 2600 pulse/gal

#### TITAN SAFTCAL™

- Dimensions: 6.75" L x 3" W x 5.9" H
- Weight: 8 lbs
- Inlet/Outlet: 3/8"

FOR MORE INFORMATION



TITAN INDUSTRIES, INC.

22335 Gosling Rd. Spring, TX 77389  
Tel #: (800) 365-2162 (281) 353-3600  
www.titan-solutions.com Fax#: (281) 353-6800