

PureFlex IS A VOTING MEMBER



DEMAND PUREFLEX™ QUALITY



CL2™ CHLORINE-BROMINE TRANSFER HOSES





CL2™ 100% COMPLIANT W

CL2™ ADVANTAGES

- Zero corrosion rate
- Does not stress fatigue or stress corrode like metal hose
- 5:1 safety factor for minimum burst
- Monel® fittings for dry service
- Hastelloy® C276 fittings for wet service
- Light weight
- Meets all Chlorine Institute standards for non-metallic hose

CL2™ HOSE SERVICES

- Chlorine
- Bromine
- Sodium hypochlorite
- Other highly aggressive oxidizers or corrosives

PureFlex CL2 hose assemblies are specifically designed for the safe transfer of chlorine in manufacturing, transporting and packaging industries. It is ideal for loading/unloading barges, rail cars, tankers and filling 1-ton, 100 lb and 150 lb cylinders. CL2 hose has excellent chemical resistance and is not subject to stress fatigue or corroding like metal hose. It is light weight, easy to clean and resists corrosion from any exposure to moisture/humidity which can unintentionally enter systems. CL2 hose assemblies are 100% compliant with the Chlorine Institute's Pamphlet 6.


SPECIFICATIONS

Max Temperature Rating: Kynar Braid +225°F

HOSE I.D. NOMINAL (in)	HOSE O.D. NOMINAL (in)	MAX. OPERATING PRESSURE* (psi)	MIN. BURST PRESSURE* (psi)	PROOF PRESSURE TEST* (psi)	NOMINAL WEIGHT** (lbs/ft)
1/2	1.0	500	2500	1000	.19
1	1.5	375	1875	750	.50
1-1/2	2.1	375	1875	750	.90
2	Consult Factory	Consult Factory	Consult Factory	Consult Factory	Consult Factory

*Pressure ratings are based at +70°F (21°C).


**Weight can vary depending on chafe guard selection.

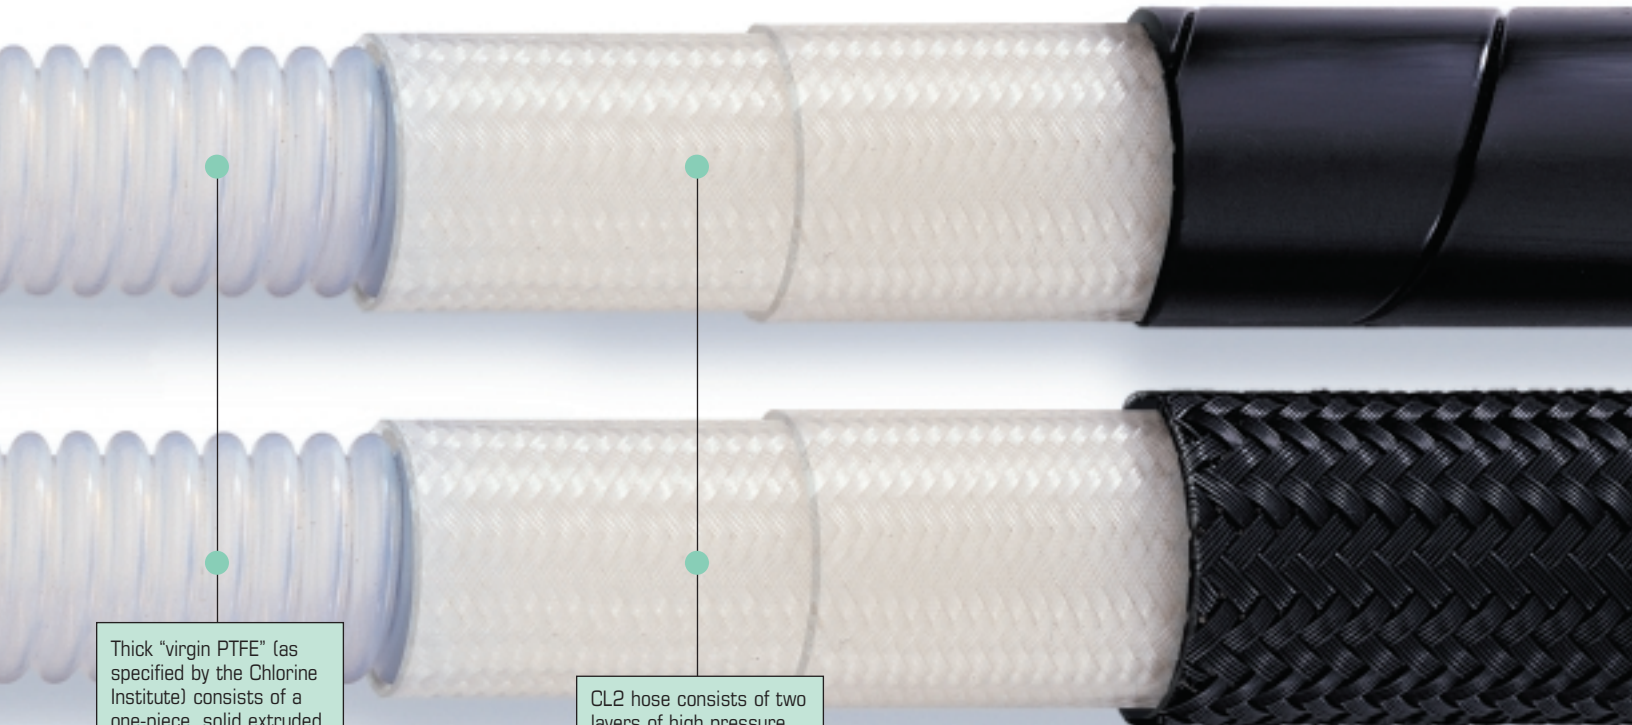

Thick "virgin PTFE" (as specified by the Chlorine Institute) consists of a one-piece, solid extruded tube with no seams or voids, helically convoluted to facilitate draining and cleaning and reduce transfer time cycles.

CL2 hose consists of two layers of high pressure rated PVDF (Kynar®) braid that is resistant to wet or dry chlorine service (1/2" is single braided). PVDF braid is specified by the Chlorine Institute.

WITH CHLORINE INSTITUTE SPECIFICATIONS

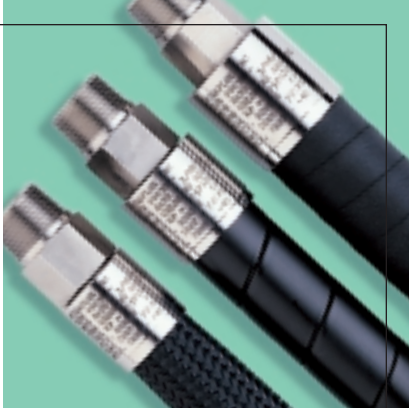


PureFlex options on CL2 hose chafe guards include (left to right):

- PVDF Kynar® heavy braid
- HDPE abrasion guard
- CPE pin pricked rubber



PureFlex offers the widest selection of hose end fittings and materials:


- Schedule 80 NPT's
- Schedule 80 flange retainers
- PFA encapsulated Schedule 80 flange retainers
- Monel material for dry chlorine (standard)
- Hastelloy C276 material for wet chlorine (option)

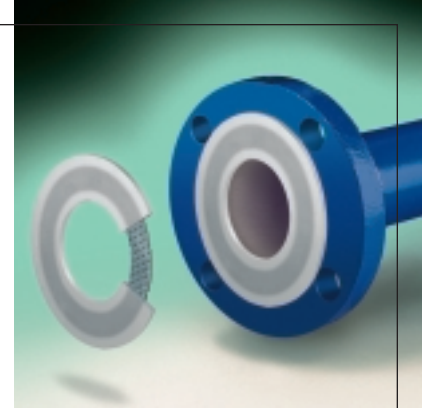

PureFlex TASK-LINE® Gaskets are manufactured with virgin PTFE resin molded around and through a stainless steel perforated metal insert. TASK-LINE Gaskets are recommended for chlorine service due to many advantages:

- Zero corrosion rate
- Blow-out protection
- Seats and releases easily
- -100°F to +400°F


PureFlex also manufactures lined expansion chambers.

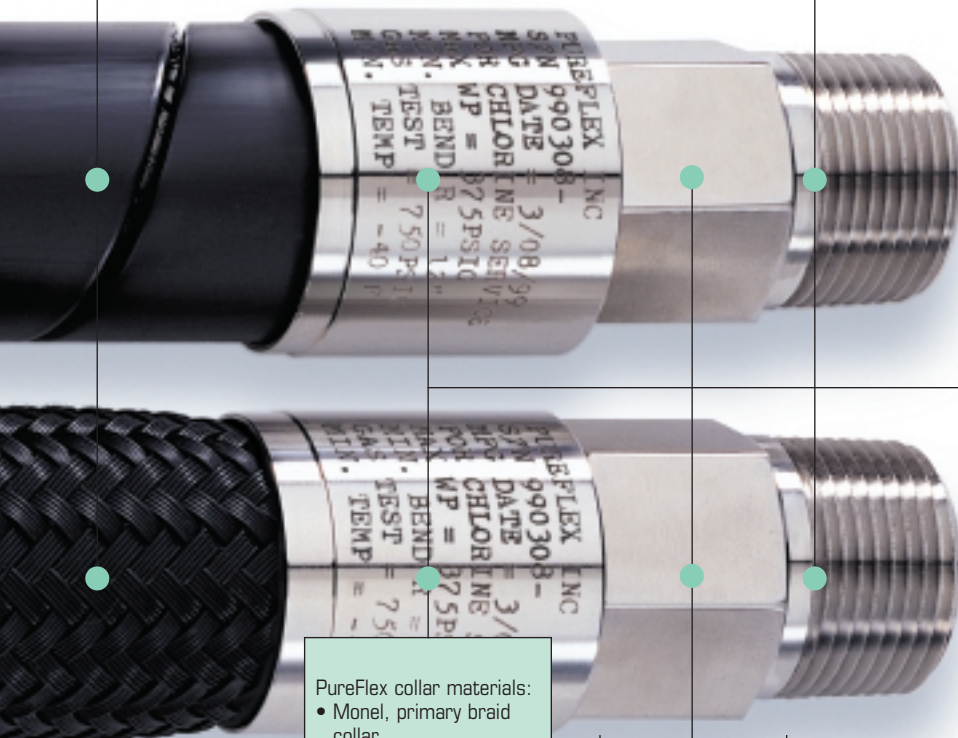

PureFlex collar materials:

- Monel, primary braid collar
- Stainless, secondary chafe guard collar as specified by the Chlorine Institute


1" wide hex flats as specified by the Chlorine Institute.

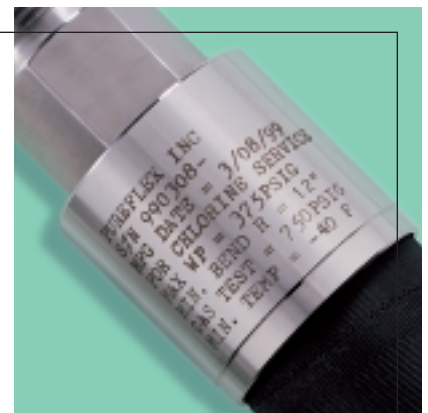

Every PureFlex CL2 hose contains the following information as specified by the Chlorine Institute:

- PureFlex, Inc.
- Manufacturing date
- For chlorine service
- Maximum working pressure
- Minimum bend radius
- Gas test pressure
- Minimum service temperature


CL2 HOW TO ORDER

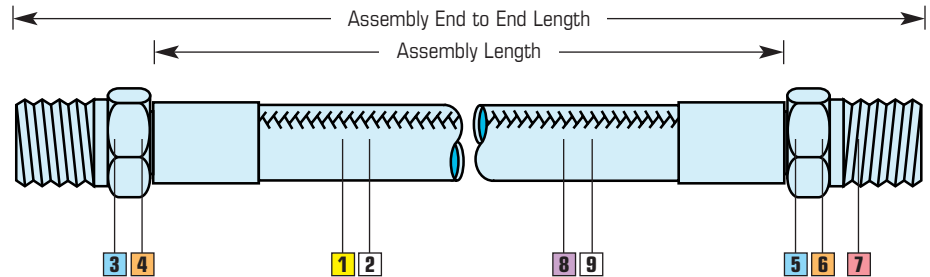

PUREFLEX™ HOSE ASSEMBLY NUMBERING SYSTEM

Steps to order a 1" CL2 assembly with a length of 12", Monel NPT both ends, Kynar braid with Kynar chafe guard.

Sample part number: CL2-16K03M03M00120K



STEP 1
Determine size:
16 = 1"

08 = 1/2"
16 = 1"
24 = 1-1/2"
32 = 2"

STEP 2
Determine hose braid:
K = Kynar

K = Kynar

STEP 3
Determine fitting style
of 1st end:
03 = Male NPT

Threaded
03 = Male pipe hex NPT
Flanges
05 = Flange retainer
25 = Enc. flange retainer

STEP 4
Determine fitting
material: **M = Monel**

H = Hastelloy
M = Monel

STEP 5
Determine fitting style
of 2nd end:
03 = Male NPT

Threaded
03 = Male pipe hex NPT
Flanges
05 = Flange retainer
25 = Enc. flange retainer

STEP 6
Determine fitting
material: **M = Monel**

H = Hastelloy
M = Monel

STEP 7
Determine flange
material: **0 = None**

0 = None
M = Monel
H = Hastelloy

STEP 8
Determine overall
length of CL2 hose in
inches:
0120 = 12"

Last digit in 1/8th increments.

STEP 9
Determine chafe guard
options:
K = Kynar

E = HDPE abrasion guard
(high-density polyethylene)
K = Kynar braid
R = CPE pin pricked

PureFlex™ Inc. information is based on technical data and testing that PureFlex™ Inc. believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. Since conditions of product are outside PureFlex™ Inc. control, PureFlex™ Inc. makes no warranties, express or implied, and assumes no liability in connection with any use of this information. TASK-LINE® is a registered trademark and PureFlex™ and CL2™ are trademarks of PureFlex™ Inc. Kynar® is a registered trademark of ELF Atochem. Monel® is a registered trademark of Huntington Alloys. Hastelloy® is a registered trademark of Cabot Corporation. All products are made in U.S.A.

4617 East Paris S.E.
Kentwood, MI 49512
Phone: (616) 554-1100
Fax: (616) 554-3633
Web: www.pureflex.com



CL2 502